

# Developing an Active Contours Model for Layer Detection from Polar Radar Imagery

<sup>2</sup>Omar Owens, <sup>3</sup>Tori Wilbon, <sup>1</sup>Jerome Mitchell <sup>1</sup>Indiana University <sup>2</sup>Winston Salem State University <sup>3</sup>Elizabeth City State University

## Abstract

- The rise of the planet's temperature has a very negative impact on the subsurface dynamics of Earth's Polar Regions.
- Analyzing the polar subsurface is typically performed manually by examining echograms acquired by radar sounder instruments operated in Greenland and Antarctica. It is necessary to develop data analysis techniques for automatically identifying and tracing bedrock and surface layers.
- To address this problem, we have identified a set of values for  $\alpha$ ,  $\beta$ , and  $\gamma$ , which are important parameters for controlling an active contour towards the surface and bedrock layers.

## Associated Challenges

- Automated processing and extraction of information from radar imagery is challenging.
- Radar inherently records noise, which is electromagnetic interference (EMI) from other electronics, such as components near the sensing equipment in the frequency band of focus.
- Analog-to-digital convertors, which convert the received energy signals for digital storage can introduce artifacts.
- Vertical and horizontal intensity variations across an image introduce additional difficulties for identifying and tracing near surface layers.

## Methodology

### Active Contours (Snakes)

- In active contours [4], a snake is defined as an energy minimization spline, which deforms to minimize the energy.
- Internal energy, which represent the tension and rigidity while the external energy attracts the snake to the target object.
- The parameters  $\alpha$ ,  $\beta$ , and  $\gamma$  as coefficients of each term represents weighting functions.

### How It's Used:

- The initial contour must be close to the bedrock and surface layers in order for the snake to move from noises or other undesired edges in the image.
- Selecting  $\alpha$ ,  $\beta$ , and  $\gamma$  values were chosen arbitrarily through trial and error depending on the best fit for a particular layer. A layer is fit when the maximum number of iterations has reached its threshold.

## Results

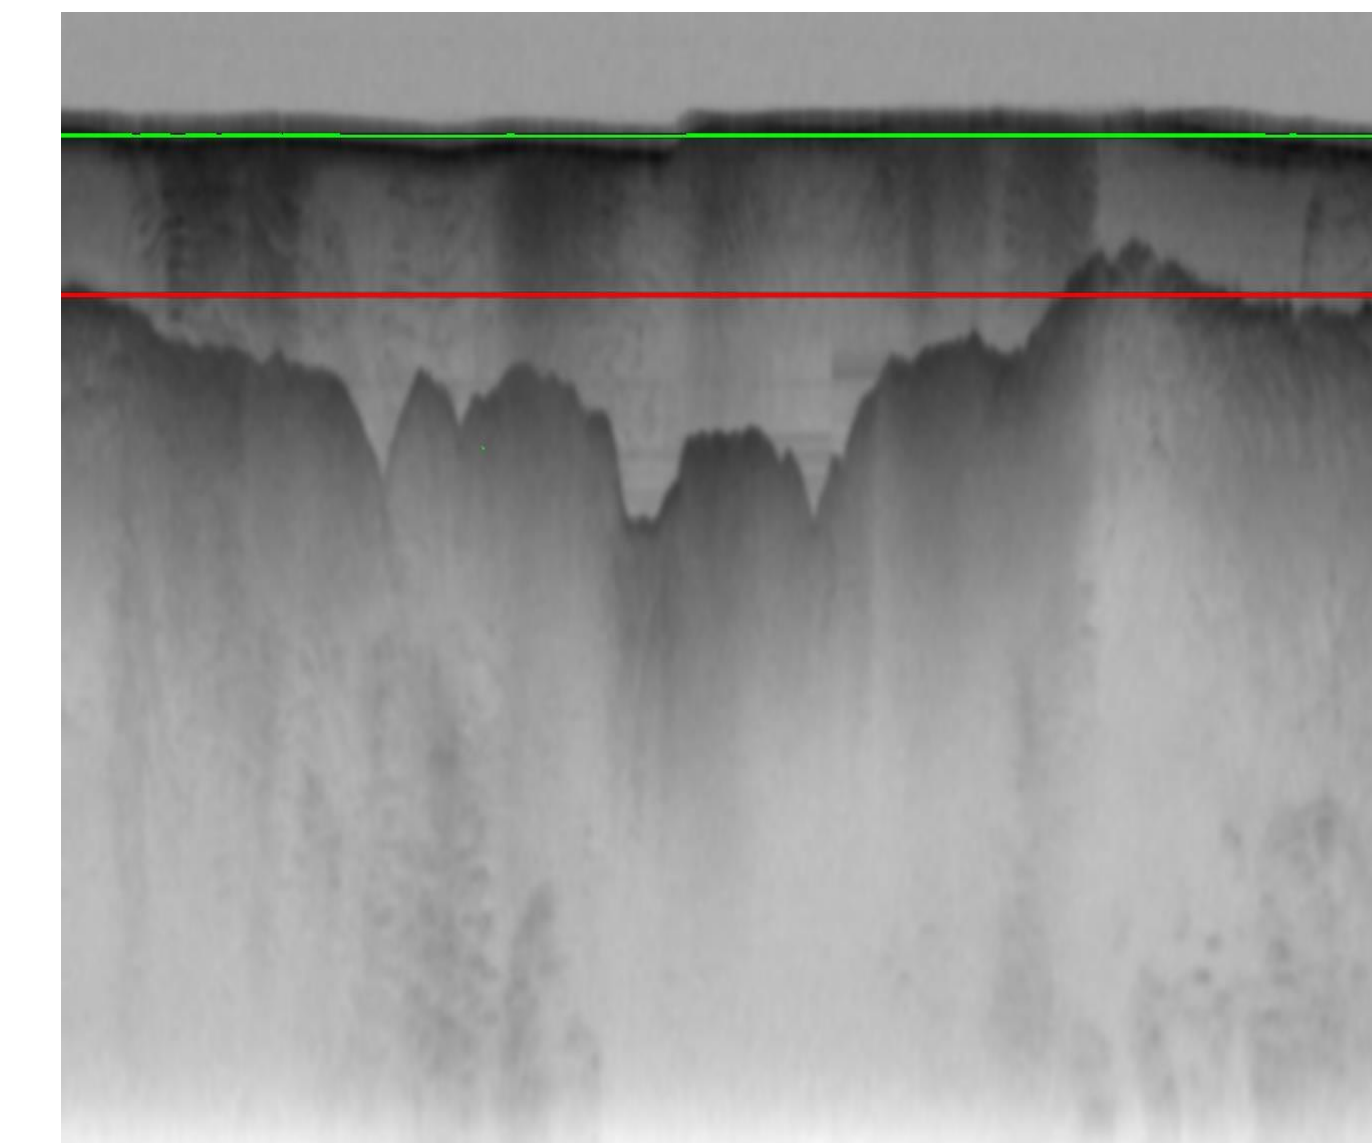


Figure 1: Represents the initializing of the boundaries

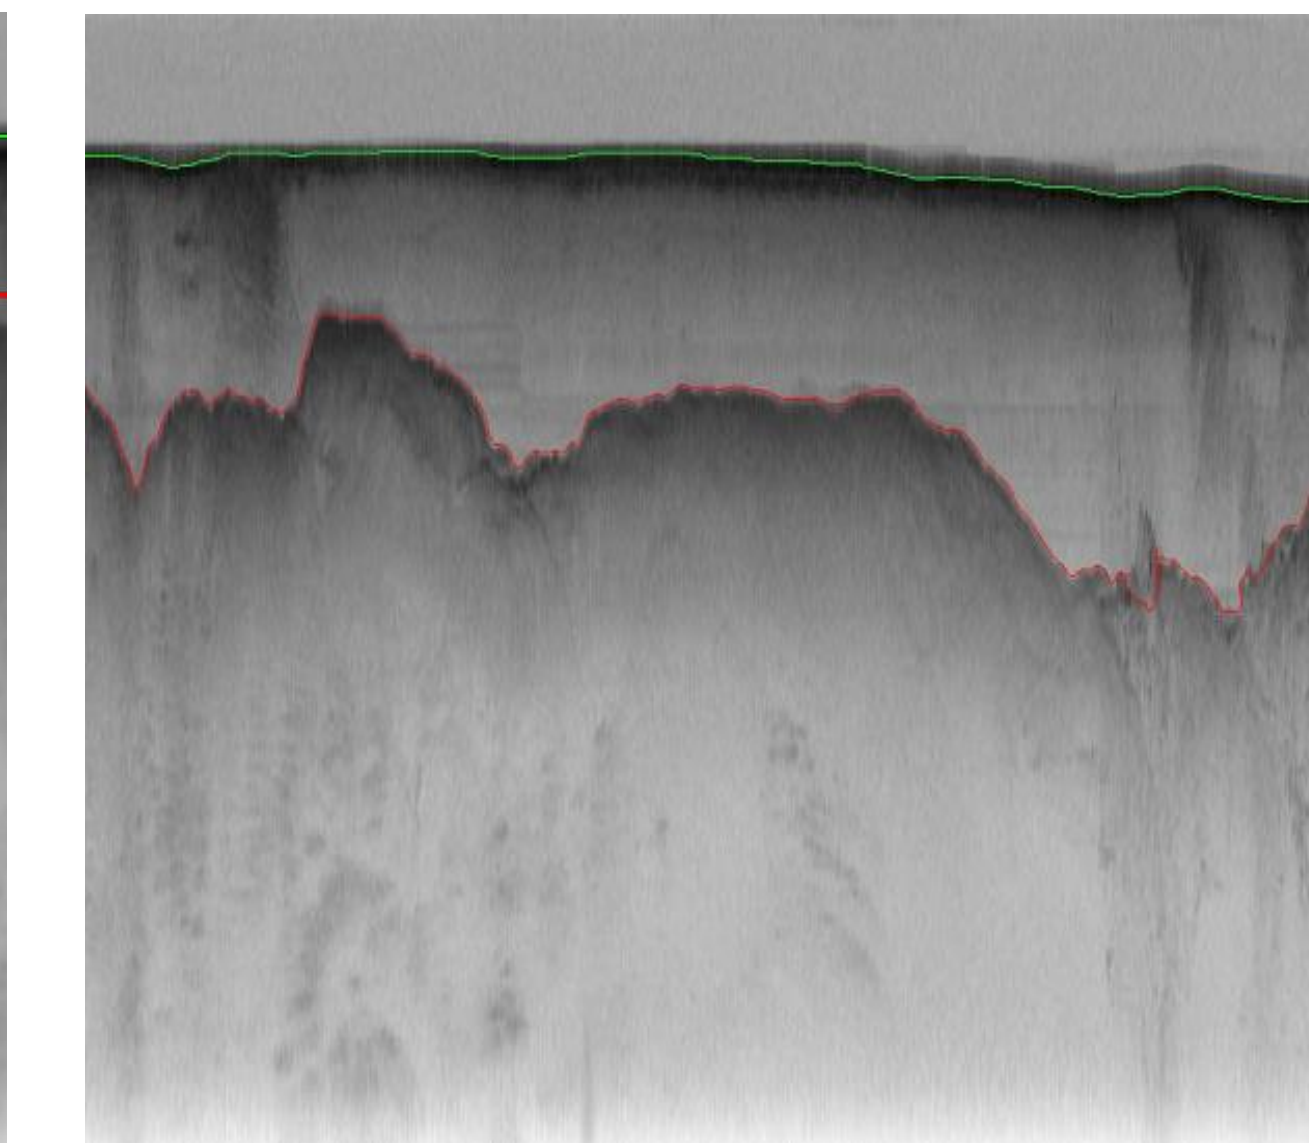


Figure 2: Represents the Active Contour not detecting the boundaries accurately

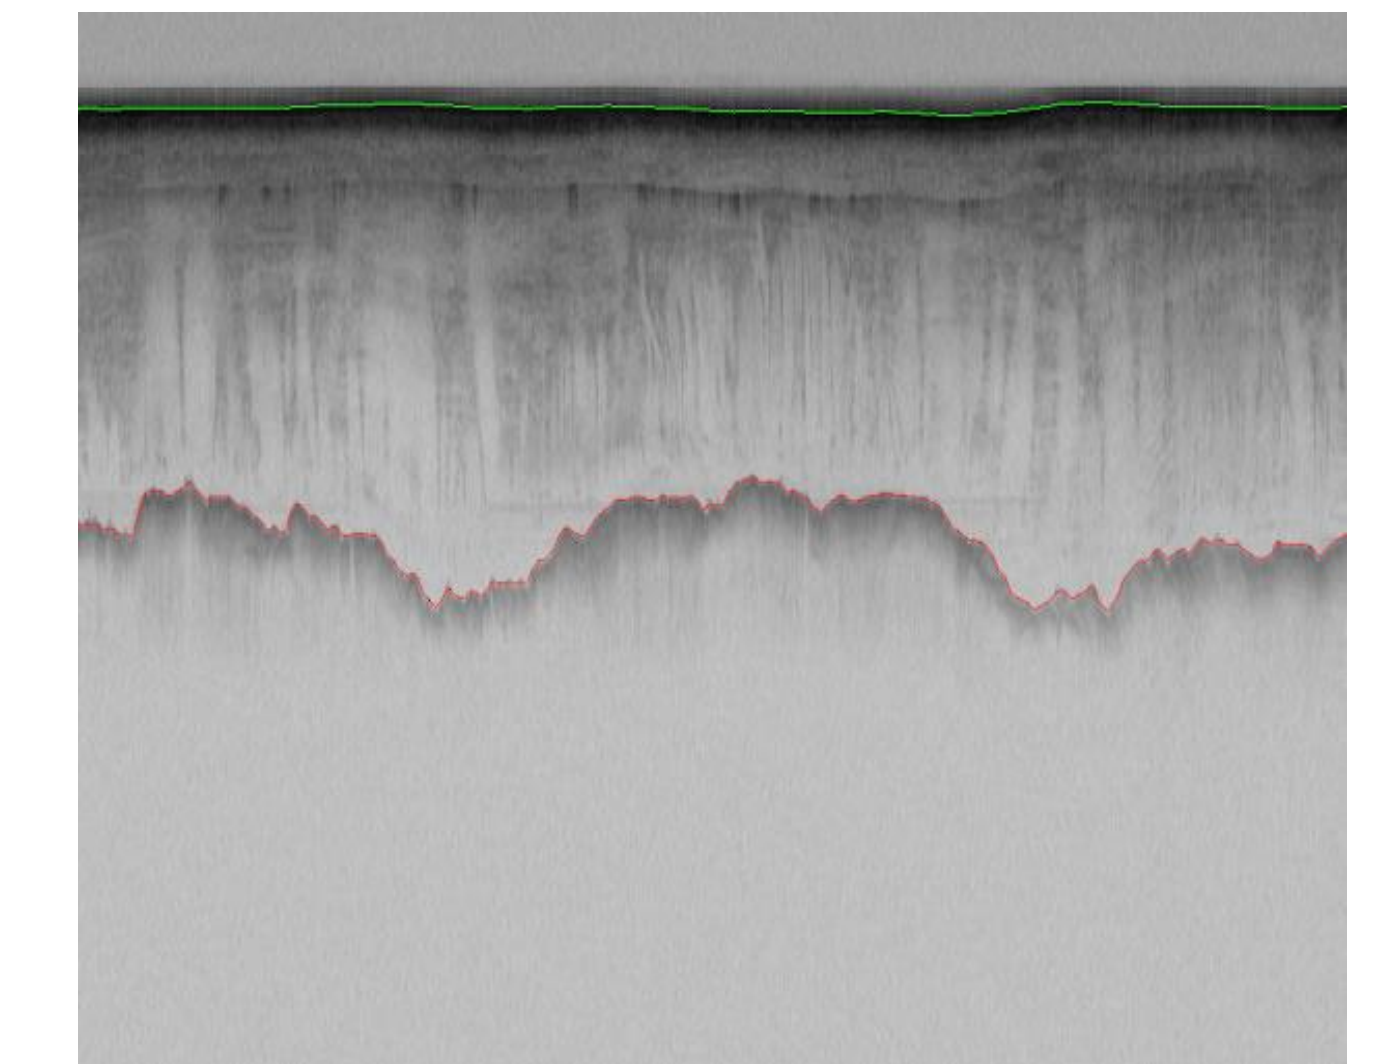


Figure 3: Acceptable Image after Active Contour

$$E_{\text{snake}} = \int_0^1 (\alpha * E_{\text{elastic}}(v(s)) + \beta * E_{\text{bending}}(v(s)) + \gamma * E_{\text{image}}(v(s))) ds$$

## Conclusion

- We have used an active contours ("snake") model, which would estimate surface and bedrock layers in depth sounder radar imagery.
- By providing tools to the polar science community, high resolution ice thickness maps can be readily processed to determine the contribution of global climate change on sea.

## Acknowledgement

This research was supported by the National Science Foundation Grants CNS-0723054 and OCI-0636361. Any opinions, findings, and conclusions or recommendations expressed in this work are those of the author (s) and do not necessarily reflect the views of the National Science Foundation. The team would like to acknowledge Dr. Geoffrey Fox, Dr. Lamara Warren, and Dr. Linda Hayden for the guidance during the period of this research.

## Introduction

- Understanding the ice flow dynamics in Greenland and Antarctica poses a significant climate problem. A modest change in ice sheet volume could strongly affect future sea level and freshwater flux to the oceans.
- This uncertainty could be substantially reduced by more and better observations of the polar ice sheets' subsurface structure.
- The Center for Remote Sensing of Ice Sheets (CReSIS) has developed a Multichannel Coherent Radar Depth Sounder (MCoRDS) radar in order to image surface and bedrock layers for producing high-resolution ice thickness maps.
- Identifying bedrock and surface layers require significant resources to complete a single radar data file consisting of thousands of measurements.
- Given the volume of radar data acquired in the past and its growth each year, automating this task is necessary for providing results to the scientific community.



## Reference

- [1] A. Turk, K. Hocaoglu, and A. Vertily. Subsurface Sensing. Wiley, 2011.
- [2] H. Frigui, K. Ho, and P. Gader. Real-time landmine detection with ground-penetrating radar using discriminative hidden markov models. J. Appl. Sig. Proc., 2005.
- [3] A. Ferro and L. Bruzzone. A novel approach to the automatic detection of subsurface features in planetary radar sounder signals. In IEEE Geo&Rem Sens. Symp., 2011.
- [4] M. Kass, A. Witkin, and D. Terzopoulos. Snakes: Active contour models. IJCV, 1(4):321-331, 1988.